


## Ager

### COLOR ENHANCER IMPREGNATOR SEALER

Sealer colour enhancer wet effect treatment. Its high penetration capacity, long life and weather resistance make it the ideal product for those looking for a product with extreme performance in terms of wet-effect toning and surface protection.



Untreated



Treated



 **EXTREME LONG-LASTING TONING**

 **MAXIMUM PROTECTION**

 **WEATHER-RESISTANT**

#### Technical data:

- ◆ **Density at 25°C gr/cm³:** 950
- ◆ **Standard colour:** colourless
- ◆ **Appearance:** light yellow liquid

#### Indicative duration:

- ◆ **Indoor:**  
12-24 months
- ◆ **Outdoor:**  
6-12 months

The stated duration is merely indicative



Solvent based



Indoor  
Outdoor



Natural stone



Quartz

#### Tools:

- ◆ Brush
- ◆ Cloth
- ◆ Sponge
- ◆ Fleece

#### How to apply it:

- ◆ Apply the product to a dry, clean surface.
- ◆ Apply the product evenly.
- ◆ Do not expose to sunlight during application.
- ◆ If applied improperly, a sticky film will form.
- ◆ After a few minutes, wipe off excess product with a clean cloth.
- ◆ Do not step on the treated surface for 4-6 hours.
- ◆ After 24 hours, the treatment will be absorbed by the material, achieving the desired protection.

#### Indicative consumption 1 l:

Consumption depends on the porosity of the material - yield per coat

Lava stone and marble	30-40m <sup>2</sup>
Quartz	20-30m <sup>2</sup>

#### Safety measures:

Read the instructions in the technical and safety data sheet and the notes on the packaging before use. Close the container after use. For professional use only.

#### Warnings:


When a surface is treated for the first time, it is advisable to evaluate the effect or adhesion on a sample or hidden corner.



Opening the can



Dampen the cloth

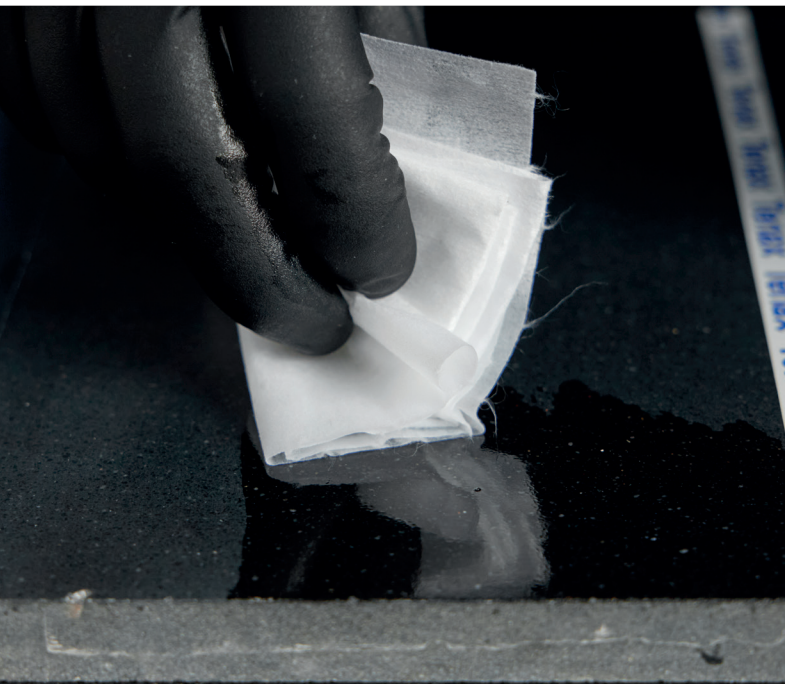


Product application



Excess removal



Protective effect

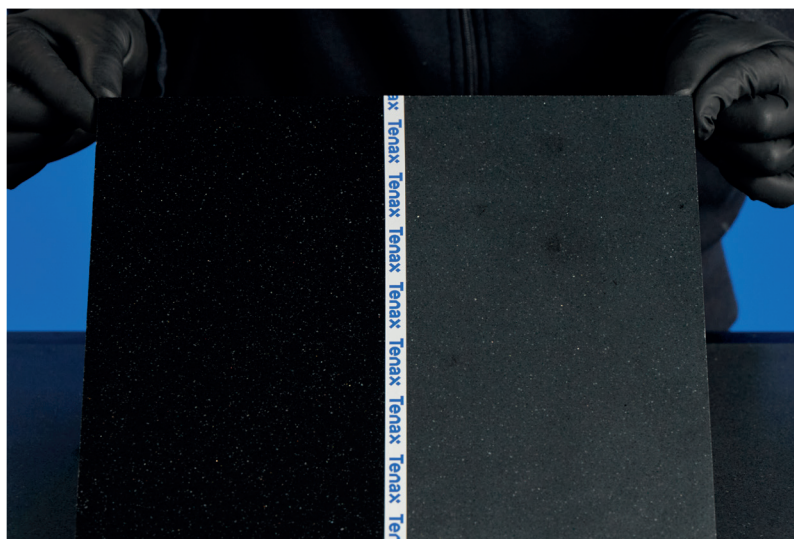

Final result